




2-3.8 t

K2

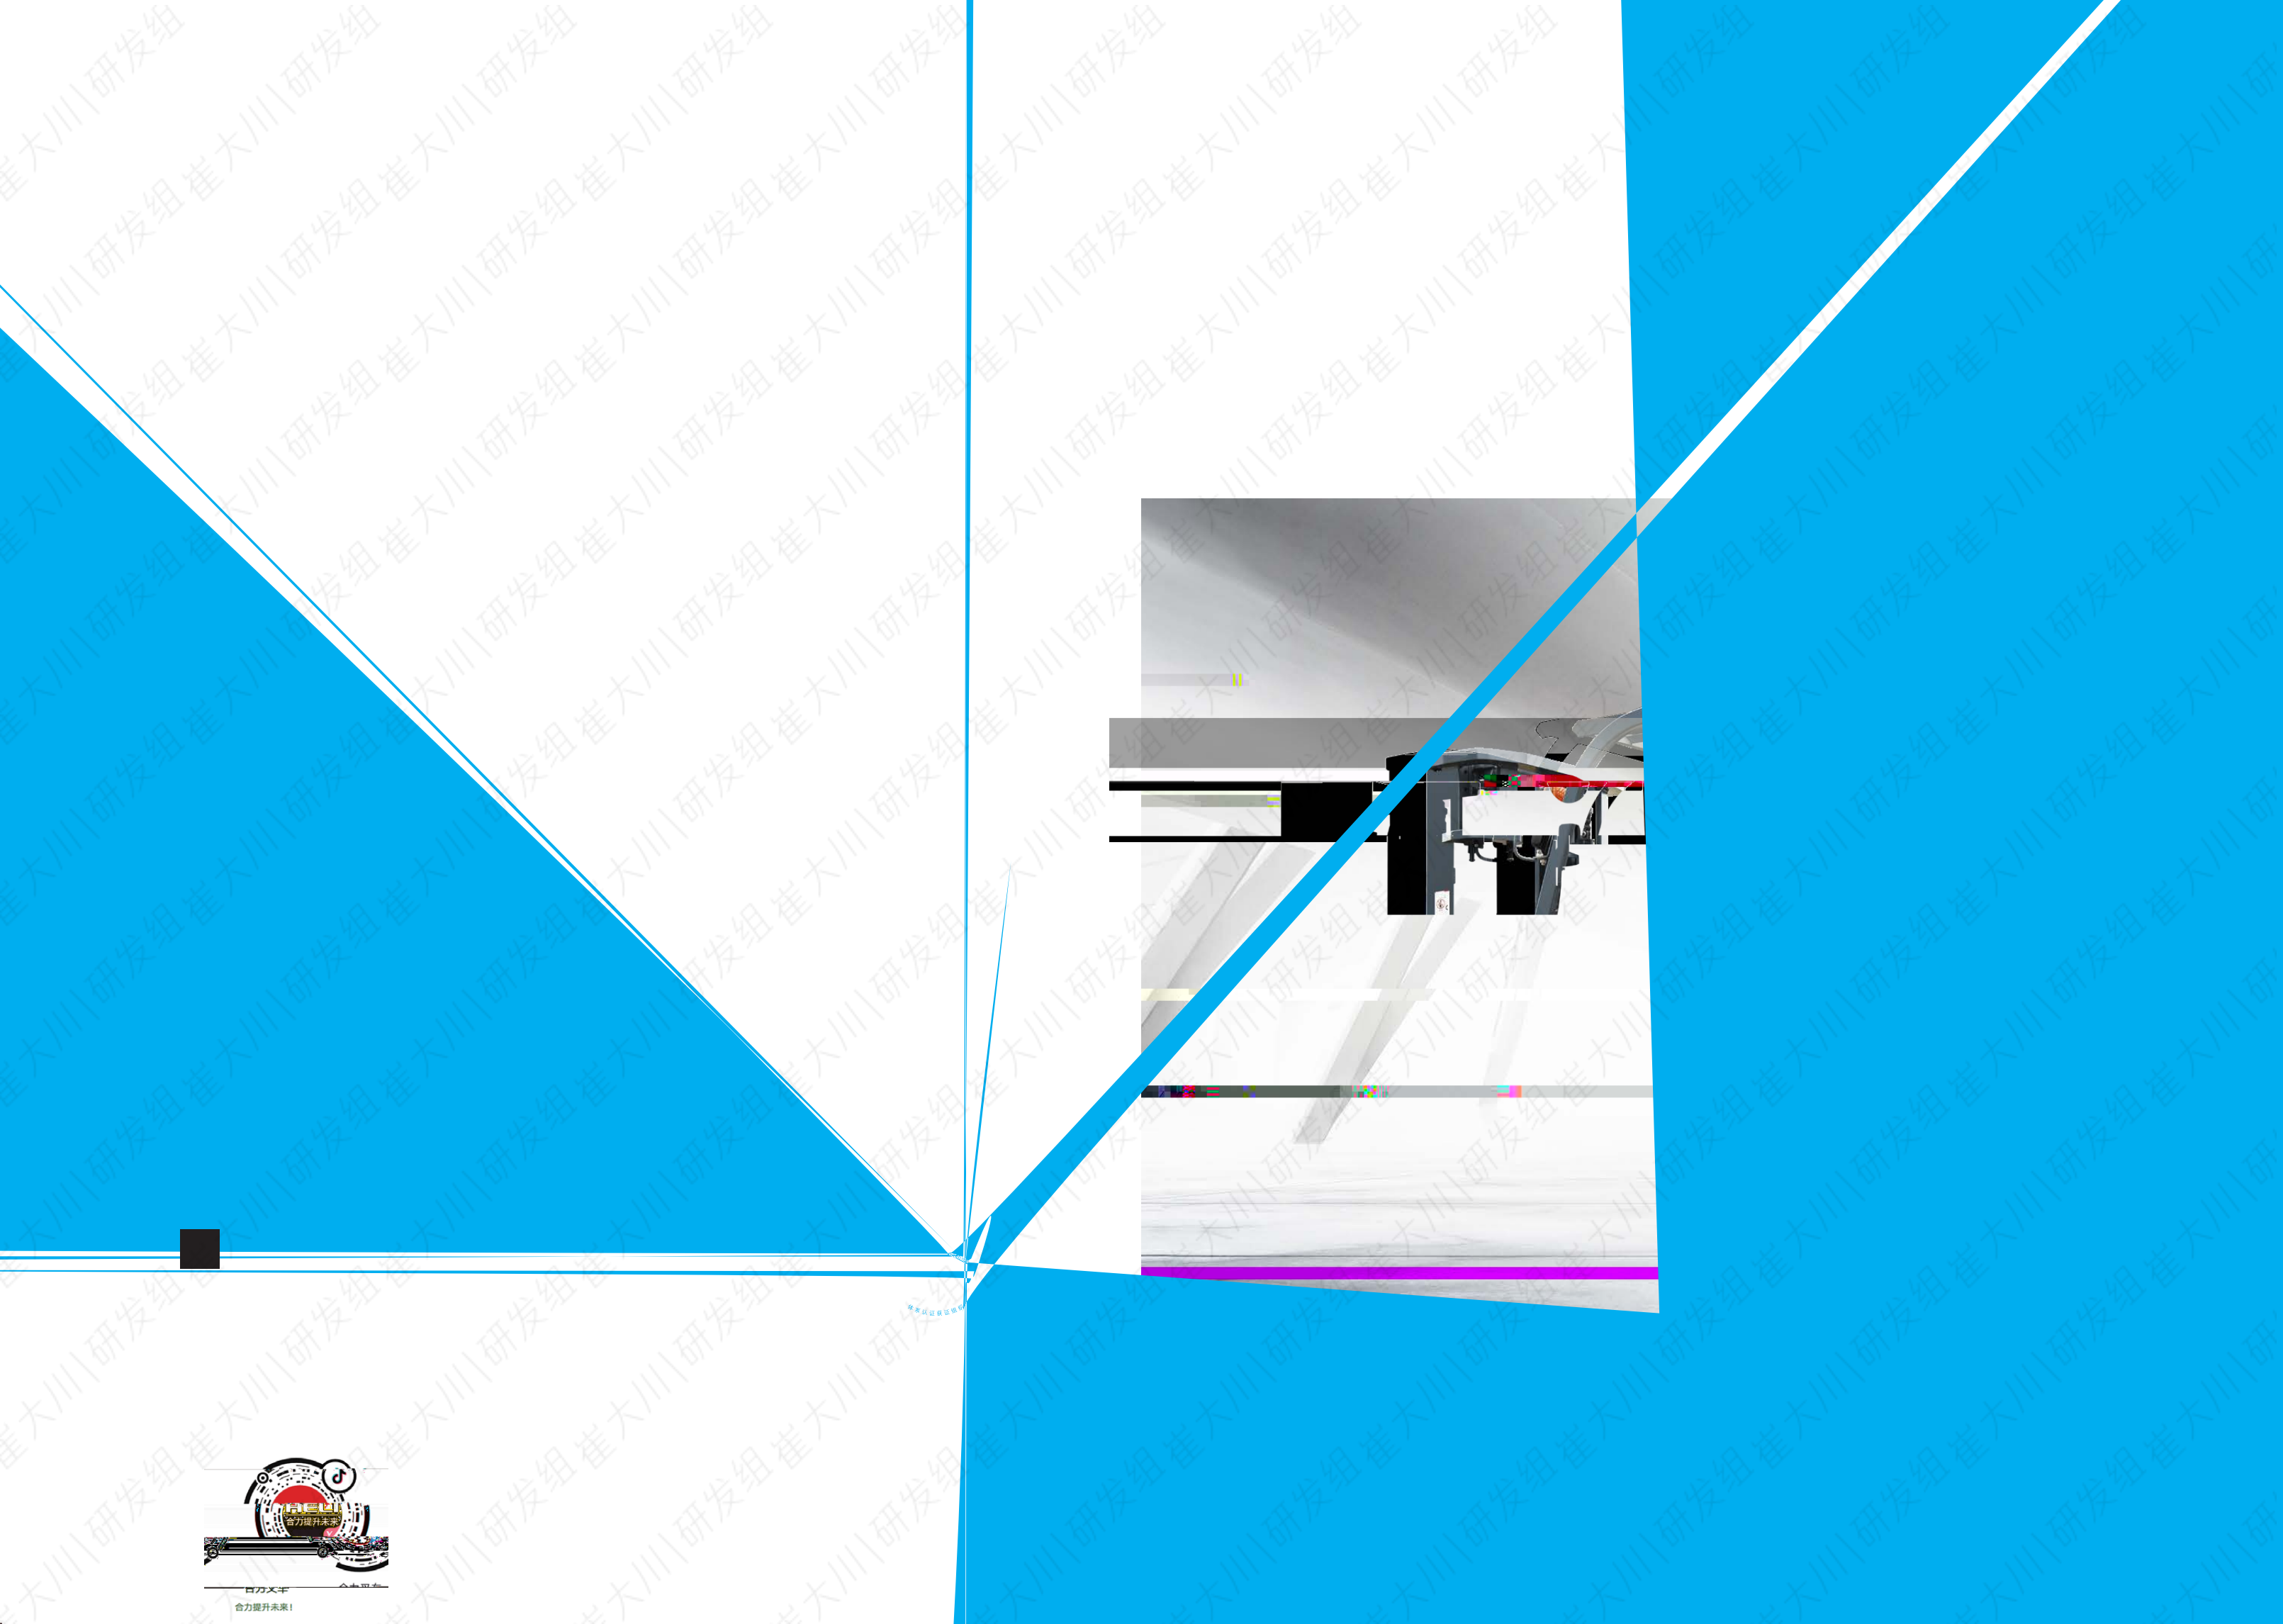

整机更可靠



性能更优越



动力更丰富



操纵更舒适



80%



13%



5%



15%



(7%)






10%



4%




(20%)




80°



LED

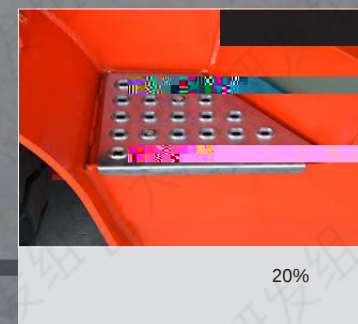

20%

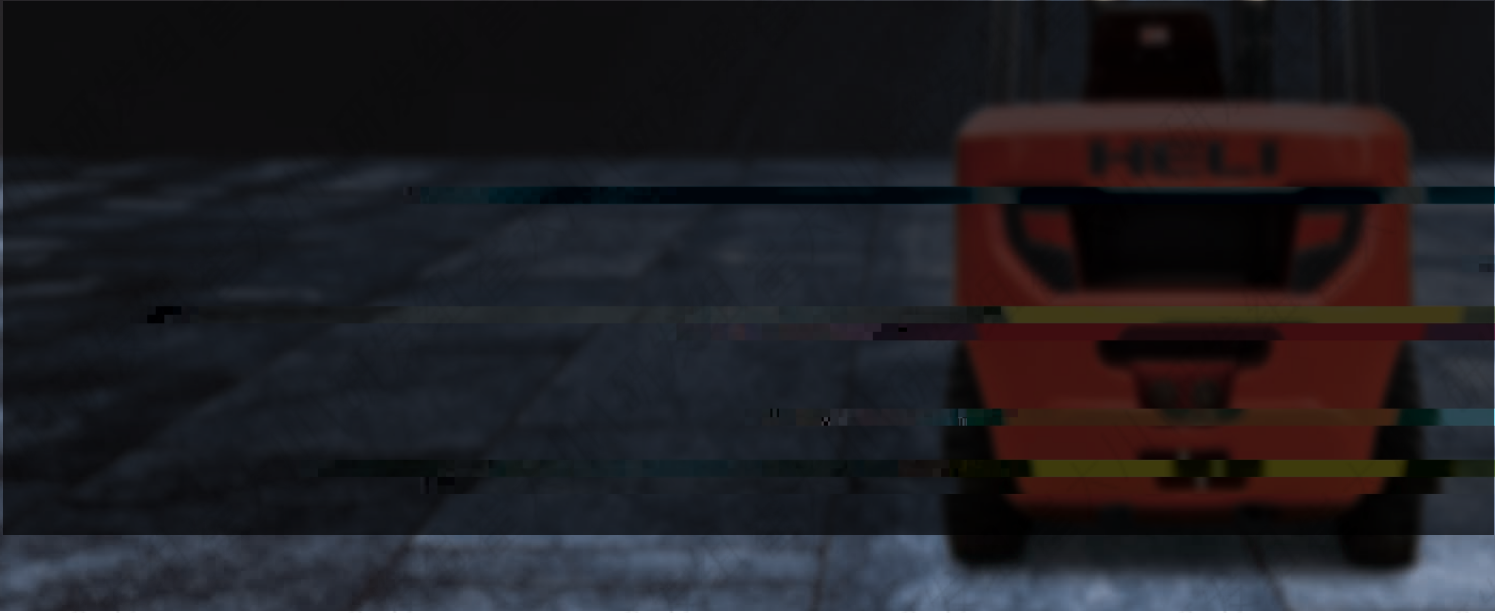

Technical drawing showing the side profile of the forklift, indicating dimensions and configuration details.

CPC(D)20	CPC(D)25	CPC(D)30	CPC(D)35	CPC(D)38
2000	2500	3000	3500	3800
500	500	500	500	500
3000	3000	3000	3000	3000
2000	2000	2070	2120	2180
4030	4030	4217	4217	4217
156	156	155	160	160
2120	2120	2140	2140	2140
115	115	135	135	135
1050	1050	1050	1050	1050
290	290	310	310	310
1000	1000	1182	1177	1177
3450/2530	3685/2615	3862/2792	3868/2798	3870/2800
1650	1650	1750	1750	1750
465	465	478	484	484
415	500	564	564	565
1160	1160	1225	1225	1225
970/970				
1030/244	1030/244	1060/250	1060/250	1060/250
2215	2270	2400	2400	2410
35	35	80	80	80
6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
920x122x40	1070x122x40	1070x125x45	1070x125x50	1070x125x50
3880	3935	4078	4084	4094
4080	4135	4278	4284	4294
3300	3650	4270	4600	4750
4710/590	5440/710	6430/840	7280/820	7710/840
1540/1760	1470/2180	1750/2520	1790/2810	1800/2950
7.00-12-12PR/6.00-9-10PR			28x9-15-14PR/6.5-10-10PR	

			CPC(D)20	CPC(D)25	CPC(D)30	CPC(D)35	CPC(D)38	CPC D 20	CPC D 25	CPC D 30	CPC D 35	CPC D 38		
/		km/h	18/18	18/18	18/19	18/19	18/19	18/18	18/18	18/19	18/19	18/19		
			18/18	18/18	19/19	19/19	18/19	18/18	18/18	19/19	19/19	18/19		
/		mm/s	500/530	500/530	420/450	380/400	390/410	500/530	500/530	420/450	380/400	390/410		
/		mm/s	450/500	450/500	450/500	450/500	360/410	450/500	450/500	450/500	450/500	360/410		
/		kN	20/12	20/12.5	19/15	19/14	21/17	20/12	20/12.5	19/15	19/14	21/17		
			20/12	20/12.5	19/16	19/16	21/17	20/12	20/12.5	19/16	19/16	21/17		
*		%	40/28	36/25	29/26	24/25	23/24	40/28	36/25	29/26	24/25	23/24		
	/		37/28	33/25	26/26	23/25	22/24	37/28	33/25	26/26	23/25	22/24		
/		V/Ah	12/80						12/80					
/			V29-50C42(493)						4D29X41(493					
/		kW/rpm	36.8/2500						36.8/2500					
/		Nm/rpm	190/1500-1800						190/1600-1800					
- x /		mm/L	4-93x105/2.85						4-93X105/2.85					
		L	70						70					
									IV					
			CPC(D)20~38-Q21K2						CPC(D)20~38-XC29K2					
			1-1		/2-2		T/M		1-1		/2-2		T/M	

: *

				/	kW/rpm	/	Nm/rpm
				L	- x		
V32-50C42	498	CPC(D)20~38-Q17K2		36.8/2500	200/1500~1800	3.17	4-98x105
4D32X41	498	CPC(D)20~38-XC24K2		36.8/2500	210/1400~1600	3.17	4-98x105
V29-50C43	493	CPC(D)20~38-Q27K2		36.8/2500	190/1500~1800	2.85	4-93x105
V29-50V42	493VP	CPC(D)20~38-Q25K2		36.8/2500	170/1800	2.85	4-93x105
4D29V41	493VP	CPC(D)20~38-XC30K2		36.8/2500	165/1600~1800	2.85	4-93x105
V32-50V42	498VP	CPC(D)20~38-Q24K2		36.8/2500	190/1500~1800	3.17	4-98x105

